

ROMEO ECO 32 - 36 - 38 - 42 - 52 - 55 ROD BENDING

Application: For bending small and medium diameter rod irons for the building industry, for use on building sites


MACHINE FOR NON EC COUNTRIES



CHARACTERISTICS

- Three phase motor 380V/50 Hz self-braking ○
- Reducer in steel ○
- Wheels for handling ○
- 2 bending speeds easily selectable ○
- Epoxy paint ○

	Motor Power		65 kg / mm ²			85 kg / mm ²			Package Dimensions	Weight (kg)	RPM
	Hp	Kw	1	2	3	1	2	3			
ECO 32T	3	2,2	28	22	18	26	20	14	75x75xh88	295	12
ECO 36T	4	3	32	24	18	30	22	16	81x81xh90	365	9
ECO 38T	4	3	34	24	20	32	22	16	81x81xh90	370	9
ECO 42T	4	3	36	28	24	34	26	22	81x81xh90	370	9
ECO 52T	5,5	4	42	34	26	40	32	24	96x86xh90	600	8
ECO 55T	5,5	4	44	36	28	42	34	26	96x86xh90	600	7

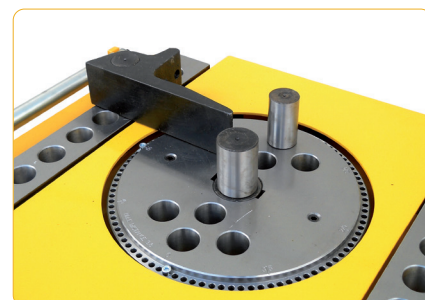

Edil Lame srl
Macchine Edil | Poggibonsi | Italia
edillame.com

MADE IN ITALY